Main features:

EN

Significant savings on energy- and maintenance costs. With a power consumption of max. 10 Watts, the REVO Compact Inground replaces halogen light sources of 75W and HQI fixtures up to 35 Watts.

Due to easily interchangeable lenses, beam angles from 8° to 54° plus elliptical are possible.

High grade stainless steel 316 top ring, for optimal protection against corrosion.

IP67 rating.

2/3/4 Way mold set included, for guaranteed waterproof connection.

NL

Enorme besparing op de energie- en onderhoudskosten. Met een opgenomen vermogen van slechts 10 Watt kunnen halogeen lichtbronnen tot 75 Watt en HQI lichtbronnen tot 35 Watt vervangen worden.

Dankzij eenvoudig verwisselbare lenzen zijn openingshoeken van 8° tot 54°, alsmede elliptical lichtbundels mogelijk.

RVS 316 afdekring voor optimale bescherming tegen corrosie.

IP67 classificatie.

De REVO Compact Inground wordt inclusief een gietmof set geleverd voor een optimale waterdichte aansluiting.

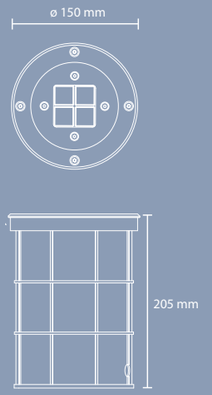

Configuring a REVO Compact Inground is extremely simple: Just choose from the different model options, housing colours, LED colours and lens types. Simply follow the steps in the overview below to obtain your REVO code.

1) REVO: RC

2) Model:
i REVO compact Inground

3) Housing colour:
2 Black anodised aluminum

4) LED colour:

01	Cold white	6300K
02	Neutral white	4000K
03	Warm white	3000K
04	Extra warm white	2700K
11	Red	
22	Royal blue	
31	Amber	

5) Lens kit:
1 12° lenses (Spot)
2 12 x 46° lenses (Elliptical)
3 30° lenses (Medium Flood)
4 54° lenses (Wide Flood)
5 8° lenses (Superspot)

Example:
You would like to order a REVO Compact Inground with black housing, warm white LEDs and spot lenses; your unique REVO Compact Inground order number will be:
RC - i- 2- 03 -1.

www.cls-led.com
© CLS March 2012